


### Product Description:

rFOIL® Standard NT radiant barrier is a perforated sheet made up of a single layer of woven polyethylene bonded to (and sandwiched between) two highly reflective radiant barrier metalized film sheets.

Standard NT helps reduce air conditioning costs in the summer while reducing heating costs in the winter. In addition to energy savings, a radiant barrier can significantly enhance a home's level of comfort.

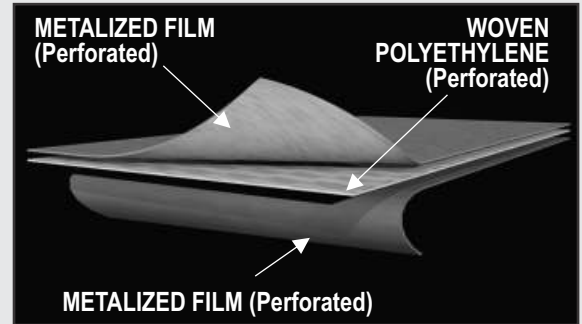

### Features:

- Made with 96% reflective radiant barriers
- Class 1 / Class A fire rating
- Unrolls and cuts easily
- Non-toxic & Non-carcinogenic
- Durable and flexible polyethylene
- Increases existing insulation performance
- Insect and bird resistant



### Applications:

- Attic Radiant Barrier

### Stock Roll Sizes:

Size:	48" x 125'	48" x 250'
Part No.	4800-48-125P	4800-48-250P

**(PERFORATED product)**

PHYSICAL PROPERTIES	TEST	VALUE
FIRE RATING	ASTM E84-09	CLASS 1 / CLASS A
	ASTM E84-09	FLAME SPREAD = 0 / SMOKE DEVELOPED = 5
EMISSIVITY	ASTM C1371-04A	0.04
REFLECTIVITY	ASTM E903	0.96
WATER VAPOR PERMEABILITY	ASTM E96	8.53 Perms
CORROSIVENESS	ASTM D3310-00	PASSES
BLEEDING and DELAMINATION	ASTM C1224-03	NO BLEEDING or DELAMINATION
PLIABILITY	ASTM C1224-03	NO CRACKING
GROWTH OF FUNGI	ASTM C1338-08	DOES NOT PROMOTE GROWTH
TENSILE STRENGTH	ASTM D2261	LENGTH: 27.34 lbs
		WIDTH: 16.31 lbs

