




Adhesive Tapes


(15000 and 11000 Series)

Aluminum Foil

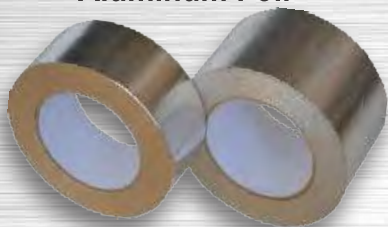

NEW


Aluminum
Conductive Foil



Poly White



Metallized
Foil

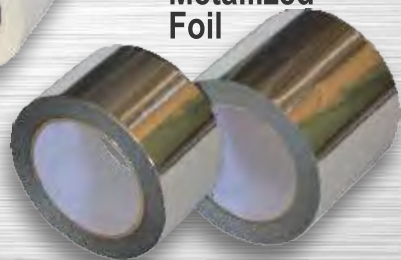

rFOIL® Benefits:

- Economical
- Quick and easy to install
- Approved vapor barrier
- Available in a variety of sizes to suit your needs

Seals:

- Seams
- Gaps
- Tab sections
- Rips
- Tears

Recommended For:

- All rFOIL® Insulation products and related applications
- Maintaining a vapor barrier and constant insulator
- New aluminum conductive tape for use on SCIF's and government facilities

rFOIL® Adhesive Tapes are available in four varieties: Aluminum, Aluminum Conductive, White Poly and Metallized Foil.

All rFOIL® tapes provide an excellent vapor barrier seal and are specifically designed for use with all rFOIL® Insulation Products.

Acrylic pressure sensitive adhesive combines superior quick-stick at normal temperatures, with excellent low temperature performance below freezing.



Adhesive Tapes

(15000 and 11000 Series)

FEATURES

BENEFITS

Metallized Foil & Aluminum Tapes

- Soft, Metallized Foil / Aluminum Foil
- Pressure Sensitive Acrylic Adhesive

- Conforms to irregular surfaces
- Maintains reflective / radiant barrier
- Adheres well to rFOIL®, sheet metal, and more!
- Effective in hot and cold climates
- Forms strong bond for long life adhesion

White Poly Tape

- Polypropylene Material
- Acrylic Adhesive

- Durable to withstand installation
- Adheres to any polyethylene or related material
- Conforms to foil or poly to give the seamless look
- Will adhere to poly or aluminum faced rFOIL®
- Adheres in all four seasons
- Will seal seams effectively for many years

APPLICATIONS

rFOIL TAPE PRODUCT CODES		rFOIL SURFACE APPLICATIONS	rFOIL INSULATION PRODUCTS TO BE USED WITH
15072 and 15073	Standard Metallized Foil	Used on rFOIL Products with a Metallized Surface	rFOIL (2200 and 4800) Series
15113	Premium Metallized Foil	For use on rFOIL Duct Insulation Products	rFOIL (2260, 2280 and 2290) Series
15512 and 15513	Aluminum Foil	Used on rFOIL Products with an Aluminum Surface	rFOIL (1800) Series
15852 and 15853	White Poly	Used on rFOIL Products with a Poly Surface	rFOIL (1620, 2500, 2600, 4320 and 4700) Series
11702	Aluminum Conductive Foil	Used on rFOIL Products with an Aluminum Surface	rFOIL (1800) Series (for SCIF Applications)

PRODUCT SPECIFICATIONS

Product Code Numbers:	15072 (2" x 180') 15073 (3" x 180') <small>Length may vary between 150'-180'</small>	15113 (3" x 150')	15512 (2" x 150') 15513 (3" x 150')	11702 (2" x 54')	15852 (2" x 150') 15853 (3" x 150')
Physical Properties	STANDARD METALLIZED FOIL	PREMIUM METALLIZED FOIL	ALUMINUM FOIL	ALUMINUM CONDUCTIVE FOIL	WHITE POLY
THICKNESS	3.0 MILS (0.003")	3.2 MILS (0.0032")	2.8 MILS (0.0028")	3.2 MILS (0.0032")	2.0 MILS (0.002")
PEEL ADHESION	30 oz. / in.	60 oz. / in.	46 oz. / in. width	35 oz. / in.	22.0 oz. / in.
BACKING	Polypropylene (BOPP)	Polypropylene (BOPP)	Aluminum Foil	Aluminum <small>Shielding Effectiveness (85db)</small>	White Polypropylene (BOPP)
ELONGATION	130%	130%	4%	5%	—
TENSILE STRENGTH	20 lbs. / in.	20 lbs. / in.	15 lbs. / in.	20 lbs. / in.	20 lbs. / in.
TEMPERATURE RESISTANCE	-40°C to 85°C	-40°C to 85°C	-40°C to 121°C	-40°C to 130°C	-30°C to 120°C
ADHESIVE	Acrylic	Acrylic	Acrylic	Acrylic Conductive	Acrylic
FIRE CLASSIFICATION	UL723	—	UL723	UL510	—

All tape specifications and sizes are subject to change without notice

Warranty, Specific Applications and Installation Guides can be found at www.rfoil.com

10/20

