


- HELPS PREVENT GROUND MOISTURE FROM CAUSING DRY-ROT
- REDUCES HEAT LOSS TO THE SURROUNDING ENVIRONMENT
- EXCELLENT VAPOR AND RADON BARRIER
- QUICK AND EASY TO INSTALL

INSTALLATION METHOD

1. Do not use fibrous insulation between your floor joists.
2. Using 16" wide rFOIL® insulation with staple tabs, staple the material between the joists, 2"-4" below the sub-floor.
3. For a higher R-value, affix rigid foam-board insulation to the underside of the floor joists, to create 2 individual reflective airspaces - above and below the reflective insulation.

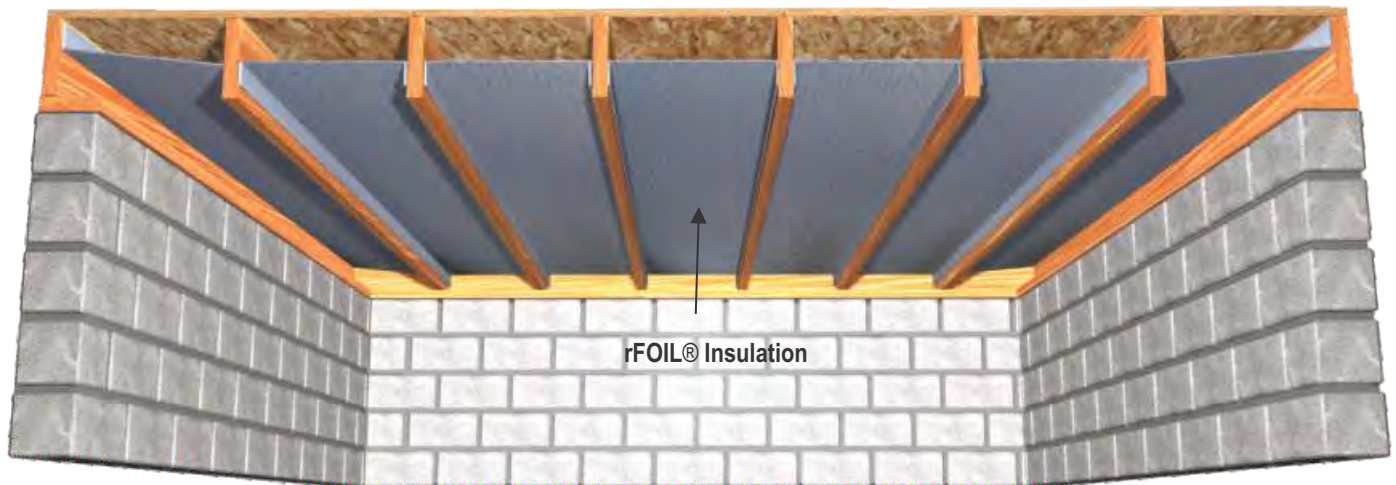

SUGGESTED PRODUCTS FOR THIS APPLICATION

rFOIL® INSULATION PRODUCT	2222 Series
rFOIL® TAPES	Not Required (Product to be Stapled)

- a) Check local building codes for compliance before installation. This installation sheet is intended solely to illustrate the proper location and placement of rFOIL® Reflective Insulation products in specific constructions applications. They are not intended to illustrate proper construction methods (which is ultimately the responsibility of the builder or contractor). The installation instructions are only recommendations relating to the location and placement of rFOIL® Reflective Insulation products and rFOIL® makes no claims that these construction systems are universally accurate.
- b) All warranties are void if rFOIL® Reflective Insulation products are used in exterior applications, or in non-enclosed systems or buildings.
- c) Exercise caution when using rFOIL® Reflective Insulation products near and around electrical wiring and devices.

