


- IDEAL INSULATION FOR METAL FRAME BUILDING APPLICATIONS
- QUICK AND EASY TO INSTALL, AND ADDS R-VALUE
- REDUCES HEAT LOSS AND HEAT GAIN ALL YEAR ROUND
- WILL BLOCK UP TO 96% OF RADIANT HEAT TRANSFER

INSTALLATION METHOD

1. Clean purlin surface and attach double-sided tape along the bottom of the purlins.
2. Temporarily attach the first rFOIL® reflective insulation perpendicular across the purlins to the double-sided tape.
3. Fasten the rFOIL® insulation with 1 1/4" self-tapping sheet metal screws and washers.
4. Temporarily attach the next rFOIL® insulation strip perpendicular across the purlins to the double-sided tape. Make sure to install it adjacent to the previous rFOIL® row and butt the edges up together. Finally, fasten the material with screws and washers.
5. Seal all seems and joints with rFOIL® tape.

Note: - Leave at least 12" around the perimeter for ventilation.
 - All water pipes and sprinklers must be below the insulation, to help prevent the possibility of freezing in winter.

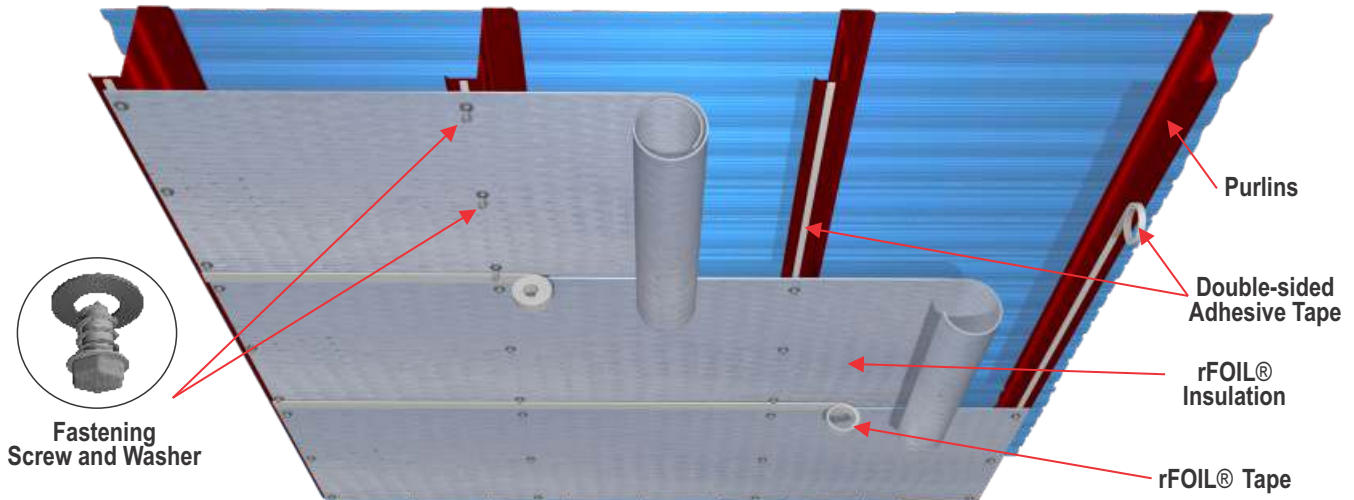

SUGGESTED PRODUCTS FOR THIS APPLICATION

rFOIL® INSULATION PRODUCT	2200, 2500 or 2600 Series (Available in Various Dimensions)
rFOIL® TAPES	for reflective side application 15072 or 15073 for poly side application 15852 or 15853

- a) Check local building codes for compliance before installation. This installation sheet is intended solely to illustrate the proper location and placement of rFOIL® Reflective Insulation products in specific constructions applications. They are not intended to illustrate proper construction methods (which is ultimately the responsibility of the builder or contractor). The installation instructions are only recommendations relating to the location and placement of rFOIL® Reflective Insulation products and rFOIL® makes no claims that these construction systems are universally accurate.
- b) All warranties are void if rFOIL® Reflective Insulation products are used in exterior applications, or in non-enclosed systems or buildings.
- c) Exercise caution when using rFOIL® Reflective Insulation products near and around electrical wiring and devices.

